


## UTILITY-45

The Utility-45 is a heavy-duty work light upgraded in 2018 to deliver even more visibility, with greater intensity and improved spread of light, facilitating safer and more productive work environments. The 50 lux line, defined by HSE as the effective level of illumination when working outdoors at night, is achieved at 16m distance, with a spread of 10m (mounted at 3m with 20 degree down angle). Combined with design features for maximising functionality and reliability, this is a product that can be relied on to deliver exceptional performance, time after time, whatever the application.




# UTILITY SERIES



## UTILITY-45

- High density LED's
- Vacuum-metallised optics deliver wide spread of light
- Versatile mounting bracket
- EMC protected
- Electronic thermal management
- ADR (ECE/TRANS/242) compliant version available
- Supplied with slim-line or wide mount
- CAE optimised 'Matrix' cooling system
- Designed & manufactured in the UK

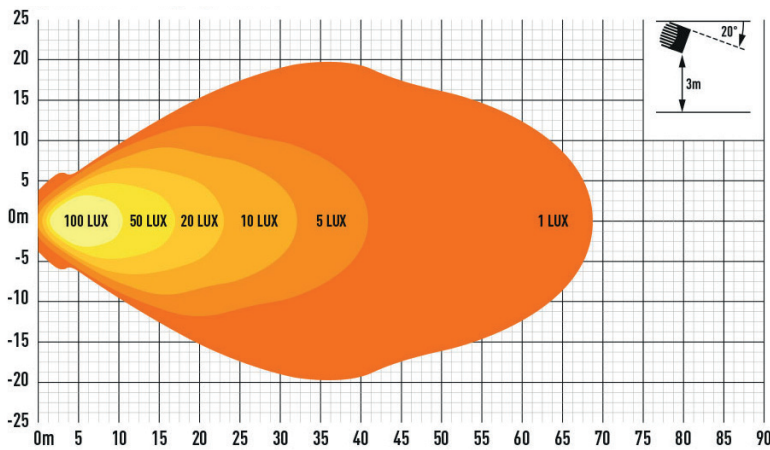

50Lx represents HSE guidelines for effective illumination when working outdoors at night.

# LAZER

HIGH PERFORMANCE LIGHTING

LAZER LAMPS LTD

Units 1+2, Harlow Mill Business Centre, Riverway, Harlow, Essex. CM20 2FD. UK

Tel: +44(0)1992 677374

Email: sales@lazerlamps.com

www.lazerlamps.com

## TECHNICAL SPECIFICATIONS

**E11**  
APPROVED  
WORKLIGHT

**IP69K**  
WATERPROOF

UPTO  
**5**  
YEAR  
WARRANTY

CISPR 25  
CLASS  
**3**

<b>WORK LAMP</b>	ECE R10
<b>VOLTAGE RANGE</b>	9V - 32V
<b>RAW LUMENS</b>	4560
<b>BEAM PATTERN</b>	Wide
<b>BEAM DISTANCE (50LX)</b>	16m
<b># HIGH POWER LEDS</b>	4
<b>POWER CONSUMPTION</b>	45 Watts
<b>CURRENT DRAW†</b>	3.1 Amps
<b>LED LIFE</b>	50,000 Hrs*
<b>WEIGHT</b>	1260g

\* LED Manufacturers Specifications †At 14.4 Volts

